

ROOF BOX INSTRUCTIONS

Fitting instructions for Roof Box (EXP1/EXP2)

Items you may require that are not included:

- Tape measure
- Step ladder (for taller vehicles)
- Drill with 7mm drill bit

Pack should contain:

- 1 x Roof Box
- 4 x Plates
- 4 x Whipbar shaped U-Bolts
- 8 x Knobs
- 8 x Bolts
- 8 x Spring washers
- 8 x Washers
- 2 x Keys
- 1 x Instructions

If pack seems incomplete or damaged, contact your Prorack dealer immediately

Fitting Instructions:

- The box may be installed on crossbars up to 85mm wide and 35mm deep or on Whipbar crossbars.
- The minimum spacing between crossbars should be 600mm


Adjusting the Roof Box on the Crossbars:

- Place the roof box on the crossbars with a pointy end facing forward and decide its position after consideration of the following factors:
- The box should be placed centrally on the crossbars
- If fitted on a wagon with a vertical lift tailgate, ensure that the roof box does not contact the raised tailgate

ROOF BOX FITTING INSTRUCTIONS

Attaching the Roof Box to Standard Shaped Crossbars:

H (Max) = 35mm – L (Max) = 85mm

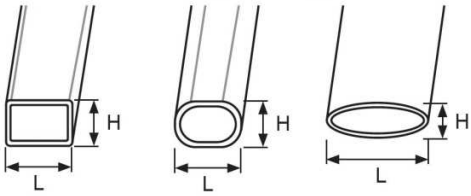

- Standard Shaped crossbars.




1.1

- Decide which mounting holes you are going to use by lining them up with a crossbar.




1.2

- Drill them through the plastic with a 7mm drill bit
- Do front mounting positions first if possible.

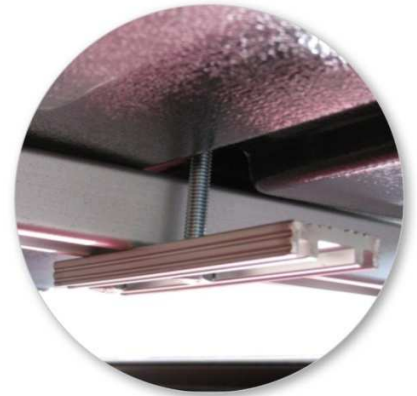

1.3

- Push bolts through the plates and up through the base of the box either side of the front crossbar, to locate the front of the box.

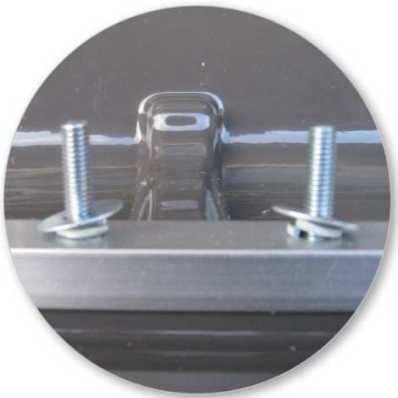

1.4

- Put one spring washer on each bolt inside of the roof box and then put one washer on top of the spring washer.



1.5

- Loosely fit plastic knobs to the top of the bolts
- Repeat the above procedure for all four mounting points. It might be necessary to adjust rear bar so position of it would suit mounting holes.
- Position the roof box centrally on the crossbars and parallel with the vehicle and fully tighten all eight knobs.

Attaching the Roof Box to the S-Wing Crossbars:



- Whispbar crossbars.




2.1

- Decide which mounting holes you are going to use by lining them up with a crossbar.



2.2

- Drill them through the plastic with a 7mm drill bit
- Do front mounting positions first if possible.

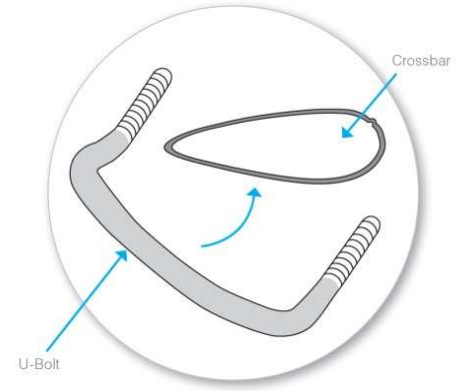

2.3

- Swing U-Bolt underneath crossbar as shown



2.4

- Push the U-Bolt up through the base of the box.



2.5

- Loosely fit plastic knobs to the threaded top ends of the U-Bolt inside the roof box.
- Position the roof box centrally on the crossbars and parallel with the vehicle and fully tighten all eight knobs.



2.6

- Ensure that the U-Bolts pull up evenly on the crossbars.

ROOF BOX FITTING INSTRUCTIONS

Instructions for use:

- Load your box with the heaviest pieces at the bottom and distribute the load evenly.
- Before driving your vehicle, ensure that the box is correctly locked and the keys have been removed. **Never** drive without the lid closed.
- To reduce fuel consumption, we recommend removing the box when it is not in use.
- Regularly check the attachment fasteners to ensure the box is secure on the crossbars
- Remove the box before entering an automatic car wash
- Clean the box using water and car detergent
- Take extra care when driving with the box fitted, the vehicles handling characteristics will change due to the roof box and its load. Remember to allow the extra height of the roof box.
- Maximum load capacity of this box is 50kg. The weight of the empty box is 15kg.



- Always use tie down lugs provided in a roof box to secure your load.



Warranty & disclaimer

1. Where the product is supplied to the customer for other than business purposes within the meaning of section 43 of the New Zealand Consumer Guarantees Act 1993, the provisions of that Act shall apply. It is important that anyone who fits or uses this product does so in accordance with the manufacturers instructions.

2. Where the product is supplied to the customer for business purposes within the meaning of section 43 of the New Zealand Consumer Guarantees Act 1993, the provisions of that Act shall have no effect and the clauses below shall apply. Where the product is supplied and purchased in Australia, the following shall apply:

a) THE SUPPLIER WARRANTS the product to be free from defects in materials and/or workmanship for a period of two (2) years from the date of original purchase (the warranty period). Proof of purchase is required. Subject to the limitations and exclusions set out below, the Supplier hereby agrees to remedy any defects in materials or workmanship becoming apparent during the warranty period, by replacing or repairing any defective product or component (at its option) free of charge to the purchaser in respect of replacement parts or labor. Any defective product or component must be notified and where practicable, returned at the purchaser's expense to the Supplier immediately upon discovery of the alleged defect and no attempt made on the part of the purchaser to repair it.

b) EXCEPTIONS, EXCLUSIONS AND LIMITATIONS TO WARRANTY. The product and/or its components must be fitted/assembled in accordance with the Supplier's written instructions. This warranty does not cover defects, loss or damage resulting a circumstances beyond the Supplier's control including, but not limited to misuse, overloading, or failure to assemble and/or fit the product or component in accordance with the Supplier's written instructions. Nor does the warranty cover defects, loss or damage resulting from accidents, unlawful use of the vehicle or defects/inconsistencies in the vehicle on which the product or component is fitted. Liability for direct, indirect, special, punitive, incidental, exemplary, contractual or consequential damage or loss arising from defects, faulty materials or design omissions or negligence or workmanship in the product or its components is hereby expressly excluded. Certain Commonwealth legislation, including the Trade Practices Act 1974, and other State and Territorial legislation confers upon purchasers rights which cannot be excluded from or be restricted or modified by contract. Any conditions, guarantees and/or warranties implied by law and incapable of exclusion are deemed to be expressly incorporated herein. Nothing herein contained is intended nor shall be permitted to be inconsistent with any such conditions, guarantees and/or warranties. To the extent permitted by legislation all conditions, guarantees and/or warranties such as implied warranties which are capable of exclusion are hereby expressly excluded and negated.

Hubco Automotive Ltd
46 Parkhouse Road
PO Box 11-017
Christchurch 8004
New Zealand

Free phone New Zealand:
0800 4776 722
Free phone Australia:
1800 143 548