

## **FRAME MOUNT CYCLE HOLDER INSTRUCTIONS**

### *Assembly Instructions for Cycle Holder (PR3058)*

**Kit contains:**

---

- 1 x 5mm Allen Key
- 6 x Knob with M6 Nut
- 3 x T-Slot Bolts
- 3 x Plastic Blocks
- 3 x Rubber Pads for U-Bolt plates
- 3 x U-Bolt Plates
- 2 x Wheel Fixing Straps
- 3 x U-Bolts
- 6 x Rubber Plugs
- 2 x Plastic Washers
- 2 x T-Slot Tie Down Anchor


Contact your Prorack dealer if any parts are missing.

**Installation to standard shaped crossbars (Max 37mm x 80mm)**

---




*Standard shaped crossbars similar to this*

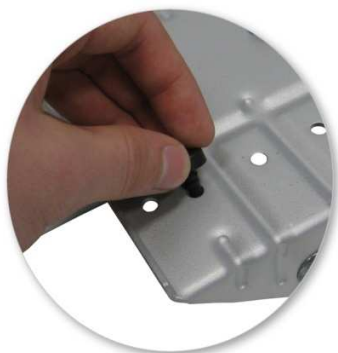

**1.01**


- Select Rubber Plugs and insert them into holes in the underside of the mounting plates.

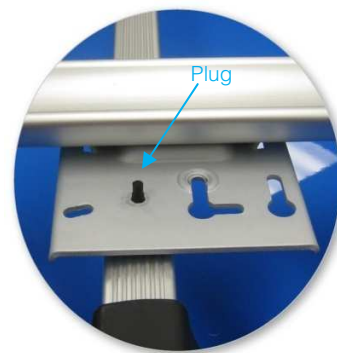

**1.02**


- Plugs should be positioned between crossbar and mounting plates to protect crossbars from an excessive wear.

## FRAME MOUNT CYCLE HOLDER INSTRUCTIONS

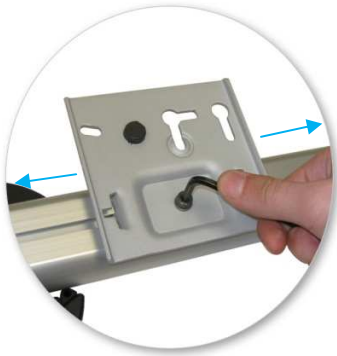

1.03

- Use 5mm Allen Key provided to adjust rear mounting plate by loosening fixing bolt.

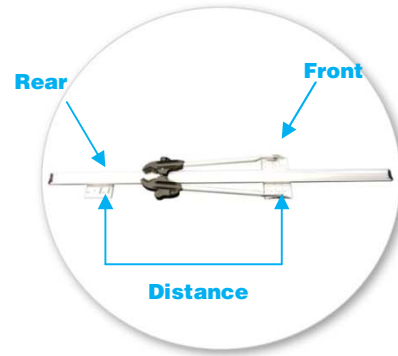

1.04

- Distance between centres of mounting plates should be same to the distance between centres of crossbars
- Fully tighten fixing bolt after you finished adjustment.




1.05

- Slide U-Bolt plates into Pads as shown.
- U-Bolt plates should be positioned centrally inside pads.
- Repeat for all 3 plates.




1.06

- Put U-Bolt through the U-Bolt plate as shown on the picture above.
- Rubber pad should be facing towards the crossbar.
- Repeat for all 3 U-Bolts.

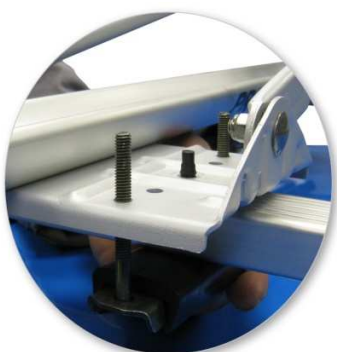

1.07

- Fit 2 U-Bolt assemblies under the front crossbar and up through the front mounting plate.



1.08

- Loosely fit 4 knobs over the threads on top of the mounting plate

## FRAME MOUNT CYCLE HOLDER INSTRUCTIONS

---




1.09

- Make sure that you are satisfied with the position of the front mounting plate.
- Fully tighten all 4 knobs.



1.10

- Fit 1 U-Bolt assembly under the rear crossbar and up through the mounting plate.
- Fit 2 plastic washers over the threads on top of the mounting plate.



1.11

- Loosely fit 2 knobs over the threads.



1.12

- Make sure that you are satisfied with the position of the rear mounting plate.
- Fully tighten both knobs.

### **Installation to T-Slot crossbars**

---



*T-Slot crossbars similar to this*

## FRAME MOUNT CYCLE HOLDER INSTRUCTIONS




2.1

- To fit T-bolts, open end cap cover.
- Loosen screw and rotate security tab away from T-slot.
- NOTE: This step applies only to S-wing Through Bar.




2.2

- Depress rubber infill and fit T-bolts.
- Fit 2 T-bolts on front crossbar and 1 on rear crossbar.
- Once T-bolts are fitted, rotate security tab and tighten the screw, then close end cap cover.




2.3

- Once T-bolts are fitted put 1 Plastic Block over each T-bolt.
- Make sure that curve on the bottom of the Plastic Block match with the curve of the crossbar.

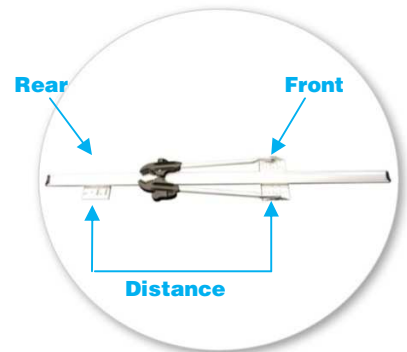


2.4

- Distance between front and rear mounting points should be same to the distance between T-bolt threads.

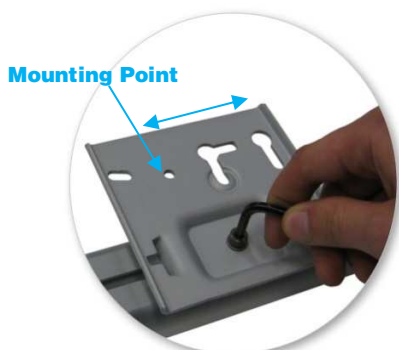

2.5

- Use 5mm Allen Key provided to adjust position of the rear mounting plate by loosening fixing bolt.
- Fully tighten fixing bolt after you finished adjustment.

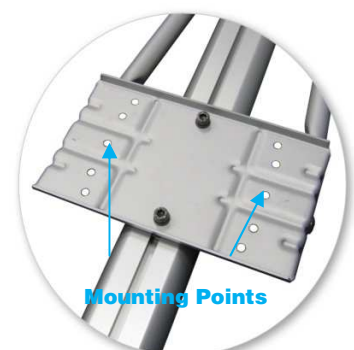

2.6

- Suggested mounting points for the front mounting plate.

## FRAME MOUNT CYCLE HOLDER INSTRUCTIONS

---



2.7

- Place your cycle holder on crossbars.
- Make sure that all 3 of the T-bolt threads went up through the mounting plates.



2.8

- Loosely fit 3 knobs over T-bolt threads



2.9

- Make sure that you satisfied with the position of your cycle holder.
- Fully tighten all 3 knobs.

## Fitting Tie Downs onto the Cycle Holder

---



3.1

- Pull your tie down strap through the T-slot tie down anchor as shown on the picture above



3.2

- Repeat for both tie downs.

## FRAME MOUNT CYCLE HOLDER INSTRUCTIONS

---



3.3

- Remove both end caps from the channel.



3.4

- Slide both tie down assemblies into T-slot at the bottom of the channel, one from front end and another from rear end.



3.5

- Replace both end caps.

## Fitting a Cycle onto the Holder

---



4.1

- Use key to unlock Locking Cam.
- Pull Locking Cam towards yourself to release clamp arms.



4.2

- Turn Locking Cam left to spread clamp arms wide enough to clamp over cycle frame.

## FRAME MOUNT CYCLE HOLDER INSTRUCTIONS

---



4.3

- Turn your Locking Cam right to make fine adjustments of clamp arms to suit your cycle.
- Push locking cam outwards to lock clamp arms.
- Check that pads on clamp arms are squashed to make sure that clamp arms are grabbing strong enough on the cycle frame



4.4

- Secure both cycle wheels to the channel with tie down straps as shown on the picture above.
- Wide tie down over the wheel once and then through the catch.



4.5

- Use key to lock locking cam.



4.6

- To remove cycle from the cycle holder follow these steps in a reverse order

### Securing the Cycle

---

- The maximum permissible load specified in the roof bars fitting instructions should be observed.
- Maximum permissible load = weight of the roof bars + weight of the cycle holder + weight of the cycle.
- Before attaching the cycle to the holder, remove all loose accessories from the cycle.
- If possible secure handlebar and pedals to prevent movement.

***Attention!***

---

- At the start of a trip check that the rack is correctly fitted and that all fasteners are secure.
- Check the cycle regularly during long trips.
- Ensure that no part of the cycle or its accessories can damage the vehicle.
- Record your key number here.

Your Key Number is					

***Driving Tips***

---

- Adjust your speed to allow for the cycle.
- The vehicle handling characteristics will change due to the cycle.
- Remember to allow for the extra height of the cycle.

***Care and Maintenance***

---

- Wheel fixing straps must be inspected regularly and should be replaced in the event of damage or excess wear.
- For security and fuel economy reasons it is advisable to remove your cycle holder when it is not required.
- Store your cycle holder in a clean dry place.



### **Warranty & Disclaimer**

---

- 1 Where the product is supplied to the customer for other than business purposes within the meaning of section 43 of the New Zealand Consumer Guarantees Act 1993, the provisions of that Act shall apply. It is important that anyone who fits or uses this product does so in accordance with the manufacturers instructions.
- 2 Where the product is supplied to the customer for business purposes within the meaning of section 43 of the New Zealand Consumer Guarantees Act 1993, the provisions of that Act shall have no effect and the clauses below shall apply. Where the product is supplied and purchased in Australia, the following shall apply:
  - a) THE SUPPLIER WARRANTS the product to be free from defects in materials and/or workmanship for a period of two (2) years from the date of original purchase (the warranty period). Proof of purchase is required. Subject to the limitations and exclusions set out below, the Supplier hereby agrees to remedy any defects in materials or workmanship becoming apparent during the warranty period, by replacing or repairing any defective product or component (at its option) free of charge to the purchaser in respect of replacement parts or labour. Any defective product or component must be notified and where practicable, returned at the purchaser's expense to the Supplier immediately upon discovery of the alleged defect and no attempt made on the part of the purchaser to repair it.
  - b) EXCEPTIONS, EXCLUSIONS AND LIMITATIONS TO WARRANTY. The product and/or its components must be fitted/assembled in accordance with the Supplier's written instructions. This warranty does not cover defects, loss or damage resulting from circumstances beyond the Supplier's control including, but not limited to misuse, overloading, or failure to assemble and/or fit the product or component in accordance with the Supplier's written instructions. Nor does the warranty cover defects, loss or damage resulting from accidents, unlawful use of the vehicle or defects/inconsistencies in the vehicle on which the product or component is fitted. Liability for direct, indirect, special, punitive, incidental, exemplary, contractual or consequential damage or loss arising from defects, faulty materials or design omissions or negligence or workmanship in the product or its components is hereby expressly excluded. Certain Commonwealth legislation, including the Trade Practices Act 1974, and other State and Territorial legislation confers upon purchasers rights which cannot be excluded from or be restricted or modified by contract. Any conditions, guarantees and/or warranties implied by law and incapable of exclusion are deemed to be expressly incorporated herein. Nothing herein contained is intended nor shall be permitted to be inconsistent with any such conditions, guarantees and/or warranties. To the extent permitted by legislation all conditions, guarantees and/or warranties such as implied warranties which are capable of exclusion are hereby expressly excluded and negated.

Hubco Automotive Ltd  
46 Parkhouse Road  
PO Box 11-017  
Christchurch 8004  
New Zealand

Free phone New Zealand:  
0800 4776 722  
Free phone Australia:  
1800 143 548