

# K305 ASSEMBLY AND FITTING INSTRUCTIONS

## Kit Contains

- 1 x Set of Assembly Instructions
- 1 x Hex Key, 5mm
- 4 x Clamps
- 4 x Capscrews Button Head, M6 x10
- 4 x Capscrews, M8 x30
- 4 x Plastic Washers, M8
- 4 x Steel Washers, M8

Contact your supplier if any items are missing

## Items you may require that are not included:

- Tape Measure
- Step Ladder (for taller vehicles)

### Important Notes:


Disregard sections 2 - 5 in the Crossbar Assembly Instructions and refer to these instead.

Maximum  
P-bar  
Load  
Rating

**65  
kg**

When Fitted and loaded correctly

## 1. Crossbar Legs And Internal Clamp Preparation

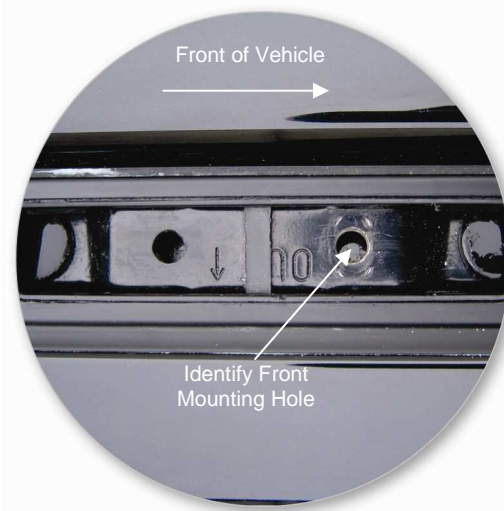

### 1.1




- Remove the bottom adjusting screw on each leg
- Fit a rubber pad to the bottom surface of each leg.
- There are two studs for correct location

- Stand on a ladder
- Identify four front mounting holes
- Remove cover caps
- Store these caps in a safe place
- Use front mounting holes for correct location

- Place a clamp over the front mounting hole  
Clamp end with a round hole in it should face down. Top edge of clamp should point to the roof centre
- Use M6 x10 screw to mount the clamp
- Check that clamp is fitted correctly
- Tighten the screw with Allen Key
- Repeat for all four fix points

## ***2. Crossbar Fitment***

---

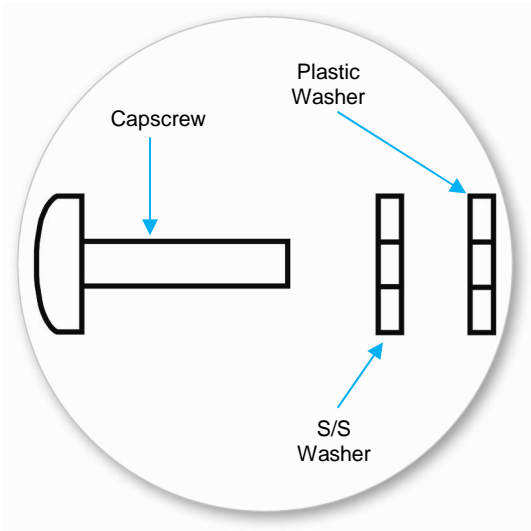

2.1

- Place crossbar assemblies over the clamps
- Move crossbar legs in or out to match clamp positions
- Place steel and plastic washers on M8 capscrews in a same sequence as shown on a picture above



2.2

- Press down on crossbar to line up the thread on square nut in the foot and clamp
- Attach leg to clamp by fitting M8 capscrew through the clamp and screwing it into the square nut inside of the foot
- Repeat for all four legs



- Tighten M8 capscrews to 4Nm
- Press leg inwards and pull crossbar out to adjust position of crossbar on legs
- Check that crossbars overhang is even on each side
- Tighten top adjusting screw to 4Nm on all four legs
- Fit four leg cover panels by hooking them in at top first and then clipping them in at the sides.

### ***Warning Notes***

---

- Use these instruction in conjunction with crossbar instructions

***WARNING: Check the Tightness of Screws Regularly***